


pierścienie RB - DIN 7993

d ₁	○					H			d ₁	○					H		
	d ₇	d ₃	Δ	e	$\frac{\Delta}{(kg/1000)}$	d ₂	Δ	r		d ₇	d ₃	Δ	e	$\frac{\Delta}{(kg/1000)}$	d ₂	Δ	r
7	0.8	7.9		4	0.071	7.8		0.5	45								
8	0.8	8.9	+0.3	4	0.083	8.8		0.5	48								
10	0.8	10.9		4	0.108	10.8		0.5	50								
12	1.0	13.2		6	0.196	13.0		0.6	55								
14	1.0	15.2		6	0.234	15.0	±0.05	0.6	60								
16	1.6	17.8		8	0.706	17.6		0.9	65								
18	1.6	19.8		8	0.804	19.6		0.9	70								
20	2.0	22.3		10	1.320	22.0		1.1	75								
22	2.0	24.3		10	1.470	24.0		1.1	80								
24	2.0	26.3		10	1.630	26.0		1.1	85								
25	2.0	27.3	+0.5	10	1.700	27.0		1.1	90								
26	2.0	28.3		10	1.790	28.0		1.1	95								
28	2.0	30.3		10	1.940	30.0		1.1	100								
30	2.0	32.3		10	2.100	32.0	±0.10	1.1	105								
32	2.5	34.9		12	3.470	34.5		1.4	110								
35	2.5	37.9	+0.6	12	3.850	37.5		1.4	115								
38	2.5	40.9		12	4.200	40.5		1.4	120								
40	2.5	42.9		12	4.430	42.5		1.4	125								
42	2.5	45.0	+0.8	16	4.540	44.5		1.4									

○ | **RB - DIN 7993**

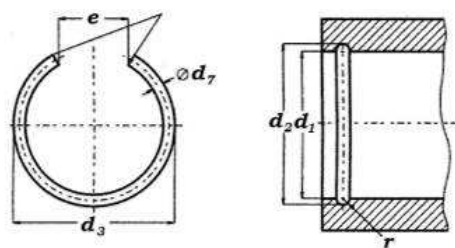

INDUSTRIAL - INOX sp.j.