


**pierścienie RW - DIN 7993**

d <sub>1</sub>	○					H			n <sub>det.</sub> x 1000 (rpm)	d <sub>1</sub>	○					H			n <sub>det.</sub> x 1000 (rpm)
	d <sub>7</sub>	d <sub>3</sub>	Δ	e <sub>z</sub>	$\frac{\Delta}{(kg/1000)}$	d <sub>2</sub>	Δ	r			d <sub>7</sub>	d <sub>3</sub>	Δ	e <sub>z</sub>	$\frac{\Delta}{(kg/1000)}$	d <sub>2</sub>	Δ	r	
4	0.8	3.1	-0.2	1	0.044	3.2	±0.05	0.5	175	40	2.5	37.1	-0.6	4	4.64	37.5	±0.10	1.4	6
5	0.8	4.1		1	0.057	4.2		0.5	112	42	2.5	39.0		4	4.87	39.5		4	1.4
6	0.8	5.1	-0.3	1	0.069	5.2	±0.05	0.5	77	45	2.5	42.0	-0.8	4	5.23	42.5	±0.10	1.4	4
7	0.8	6.1		2	0.077	6.2		0.5	57	48	2.5	45.0		4	5.60	45.5		4	1.4
8	0.8	7.1	-0.3	2	0.090	7.2	±0.05	0.5	44	50	2.5	47.0	-0.8	4	5.83	47.5	±0.10	1.4	4
10	0.8	9.1		2	0.115	9.2		0.5	28	55	3.2	51.1		4	10.51	51.8		1.8	4
12	1.0	10.8	-0.4	3	0.210	11.0	±0.10	0.6	24	60	3.2	56.1	-1.0	4	11.50	56.8	±0.15	1.8	3
14	1.0	12.8		3	0.250	13.0		0.6	18	65	3.2	61.1		4	12.49	61.8		1.8	3
16	1.6	14.2	-0.4	3	0.740	14.4	±0.10	0.9	22	70	3.2	66.0	-1.0	5	13.40	66.8	±0.15	1.8	2
18	1.6	16.2		3	0.830	16.4		0.9	17	75	3.2	71.0		5	14.39	71.8		1.8	2
20	2.0	17.7	-0.5	3	1.450	18.0	±0.10	1.1	18	80	3.2	76.0	-1.0	5	15.38	76.8	±0.15	1.8	2
22	2.0	19.7		3	1.600	20.0		1.1	15	85	3.2	81.0		5	16.38	81.8		1.8	2
24	2.0	21.7	-0.5	3	1.780	22.0	±0.10	1.1	12	90	3.2	86.0	-1.0	5	17.37	86.8	±0.15	1.8	1
25	2.0	22.7		3	1.840	23.0		1.1	11	95	3.2	91.0		5	18.36	91.8		1.8	1
26	2.0	23.7	-0.5	3	1.910	24.0	±0.10	1.1	10	100	3.2	95.8	-1.0	5	19.31	96.8	±0.15	1.8	1
28	2.0	25.7		3	2.070	26.0		1.1	9	105	3.2	100.8		5	20.30	101.8		1.8	1
30	2.0	27.7	-0.6	3	2.220	28.0	±0.10	1.1	8	110	3.2	105.8	-1.2	5	21.29	106.8	±0.15	1.8	1
32	2.5	29.1		4	3.670	29.5		1.4	9	115	3.2	110.8		5	22.29	111.8		1.8	1
35	2.5	32.1	-0.6	4	3.980	32.5	±0.10	1.4	7	120	3.2	115.8	-1.2	5	23.28	116.8	±0.15	1.8	1
38	2.5	35.1		4	4.400	35.5		1.4	6	125	3.2	120.8		5	24.27	121.8		1.8	1



**RW - DIN 7993**

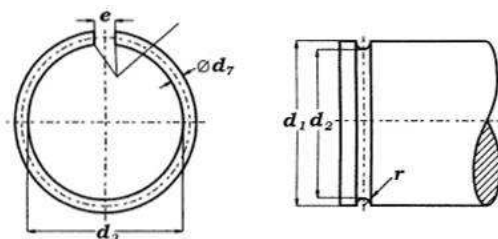

**INDUSTRIAL - INOX sp.j.**