





pięście SP - DIN 5417

D	○										D A N E										
	s	Δ	b	Δ	d ₃	Δ	e ≈	r min.	(kg/1000)	d ₂	Δ	m	Δ	d ₄₂	FN (kN)	FR (kN)	g	FRg (kN)	K (kN/mm)	Nobl. x1000 (rpm)	
30	1.12		3.25		27.4		3	0.4	2.8	28.17		1.35		34.7	13.7	22.2	2.0	3.90	32.0	16	
32	1.12		3.25		29.4		3	0.4	3.0	30.15		1.35		36.7	14.6	20.6		3.66	30.0	13	
35	1.12		3.25		32.4	+0.4	3	0.4	3.2	33.17		1.35		39.7	16.0	19.0		3.52	28.0	11	
37	1.12		3.25		34.0		3	0.4	3.4	34.77		1.35		41.3	20.7	17.8		3.22	26.6	10	
40	1.12		3.25		37.3		3	0.4	3.6	38.10		1.35		44.6	19.3	16.0		2.96	24.2	8	
42	1.12		3.25		38.9		3	0.4	3.8	39.75		1.35		46.3	23.5	15.2	2.0	2.85	23.4	7	
44	1.12		3.25		40.9		3	0.4	4.0	41.75	-0.25	1.35		48.3	24.6	14.6		2.75	22.6	7	
47	1.12		4.04		43.7		4	0.4	5.3	44.60		1.35		52.7	28.8	16.3		3.12	25.6	7	
50	1.12		4.04		46.6	+0.5	4	0.4	5.8	47.60		1.35		55.7	30.6	15.2		2.97	24.3	6	
52	1.12		4.04		48.8		4	0.4	5.9	49.73		1.35		57.9	31.6	14.5	2.5	2.30	23.4	6	
55	1.12		4.04		51.7		4	0.4	6.2	52.60		1.35		60.7	33.8	13.4	2.5	2.16	22.0	5	
56	1.12		4.04		52.4		4	0.4	6.5	53.60		1.35		61.7	34.5	13.2		2.14	21.0	5	
58	1.12		4.04		54.4		4	0.4	6.7	55.60		1.35		63.7	35.6	12.6		2.06	21.0	5	
62	1.70		4.04		58.2		4	0.6	10.5	59.61		1.90		67.7	38.1	40.6		6.75	69.0	5	
65	1.70		4.04		61.2		4	0.6	11.0	62.60		1.90		70.7	40.0	38.4		6.50	66.0	4	
68	1.70	-0.1	4.85	-0.15	63.4		5	0.6	12.6	64.82		1.90	+0.3	74.6	55.5	43.0	2.5	7.30	75.0	4	
72	1.70		4.85		67.4	+0.8	5	0.6	14.7	68.81		1.90		78.6	59.0	40.0		6.95	71.0	4	
75	1.70		4.85		70.4		5	0.6	15.3	71.83		1.90		81.6	61.5	37.2		6.60	67.0	3	
80	1.70		4.85		75.4		5	0.6	16.3	76.81		1.90		86.6	65.7	34.8	3.0	5.25	64.0	3	
85	1.70		4.85		80.4		5	0.6	17.5	81.81		1.90		91.6	70.0	32.5		5.00	61.0	3	
90	2.46		4.85		85.4		5	0.7	26.6	86.79		2.70		96.5	74.0	90.5	3.0	14.30	174.0	2	
95	2.46		4.85		90.4		5	0.7	28.2	91.82		2.70		101.6	76.3	83.5	3.5	11.50	164.0	2	
100	2.46		4.85		95.2		5	0.7	29.2	96.80		2.70		106.5	82.5	77.5		10.90	155.0	2	
110	2.46		4.85		105.2		5	0.7	32.8	106.81		2.70		116.6	90.7	69.0		10.10	143.0	1	
115	2.46		4.85		110.2	+1.0	5	0.7	34.4	111.81	-0.50	2.70		121.6	97.7	64.0		9.60	136.0	1	
120	2.82		7.21		113.6		7	0.7	60.6	115.21		3.10		129.7	143.0	134.0	3.5	20.20	290.0	2	
125	2.82		7.21		118.6		7	0.7	63.0	120.22		3.10		134.7	155.0	127.0	4.0	17.30	280.0	2	
130	2.82		7.21		123.6		7	0.7	65.6	125.22		3.10		139.7	166.0	121.0		16.70	270.0	1	
140	2.82		7.21		133.0		7	0.7	70.6	135.23		3.10		149.7	180.0	108.0		15.50	250.0	1	
145	2.82		7.21		138.0		7	0.7	73.0	140.23		3.10		154.7	186.0	102.0		14.80	240.0	1	
150	2.82		7.21		142.9	+1.6	7	0.7	77.2	145.24		3.10		159.7	193.0	94.0	4.0	13.90	235.0	1	
160	2.82		7.21		152.9		7	0.7	81.0	155.22		3.10		169.7	206.0	89.0		13.60	220.0	1	
170	3.10		9.60		161.3		10	0.7	122.0	163.65		3.50		182.9	283.0	151.0	5.0	17.90	360.0	1	
180	3.10		9.60		171.2		10	0.7	128.0	173.66		3.50		192.9	292.0	145.0		17.10	345.0	1	
190	3.10		9.60		181.0	+1.8	10	0.7	139.0	183.64		3.50		202.9	311.0	140.0		16.20	328.0	1	

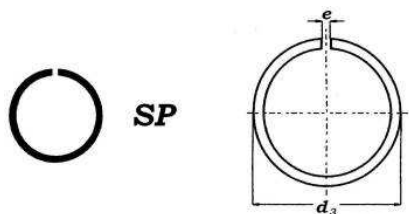





INDUSTRIAL - INOX sp.j.

pięście SP - DIN 5417

D	○										H				D A N E						
	s	Δ	b	Δ	d ₃	Δ	e ≈	r min.	(kg/1000)	d ₂	Δ	m	Δ	d ₄	FN (kN)	FR (kN)	g	FRg (kN)	K (kN/mm)	nobl. x1000 (rpm)	
200	3.10		9.60		191.0		10	0.7	148.0	193.65		3.50		212.9	336.0	132.0	5.0	15.50	312.0	1.0	
210	3.10		9.60		200.9		10	1.2	156.0	203.60		3.50		222.8	356.0	124.0	6.0	12.30	298.0	1.0	
215	3.10		9.60		205.9		10	1.2	160.0	208.60		3.50		227.8	376.0	120.0		11.90	288.0	1.0	
225	3.50		10.00	-0.15	214.3	+1.8	10	1.2	196.0	217.00		4.50		237.0	462.0	172.0		17.10	414.0	1.0	
230	3.50		10.00		219.2		10	1.2	200.0	222.00		4.50		242.0	473.0	169.0		16.80	406.0	1.0	
240	3.50	-0.1	10.00		229.2		10	1.2	209.0	232.00		4.50		252.0	495.0	162.0	6.0	16.20	392.0	0.5	
250	3.50		10.00		239.2		10	1.2	220.0	242.00		4.50		262.0	514.0	156.0		15.40	373.0	0.5	
260	3.50		10.00		247.5		10	1.2	230.0	252.00		4.50		272.0	536.0	151.0		15.00	362.0	0.5	
270	3.50		10.00		257.5		10	1.2	240.0	262.00		4.50		282.0	556.0	145.0		14.40	348.0	0.5	
280	3.50		10.00		267.5	+2.5	10	1.2	250.0	272.00	-0.50	4.50		292.0	578.0	140.0		13.90	335.0	0.5	
290	3.50		10.00		277.5		10	1.2	260.0	282.00		4.50		302.0	598.0	135.0	6.0	13.40	323.0	0.4	
300	4.50		12.00		284.5		10	1.5	400.0	290.00		5.50		314.0	694.0	332.0		33.00	795.0	0.6	
310	4.50		12.00		294.0		10	1.5	412.0	300.00		5.50		324.0	800.0	320.0	7.0	27.30	770.0	0.5	
320	4.50		12.00	-0.30	304.0		10	1.5	420.0	310.00		5.50		334.0	824.0	312.0		26.50	747.0	0.5	
340	4.50		12.00		324.0		10	1.5	446.0	330.00		5.50		354.0	875.0	293.0		25.00	702.0	0.4	
360	4.50	-0.2	12.00		343.0	+3.0	10	1.5	475.0	350.00		5.50		374.0	930.0	276.0	7.0	23.40	660.0	0.4	
370	4.50		12.00		353.0		10	1.5	485.0	360.00		5.50		384.0	955.0	267.0		22.70	640.0	0.4	
380	4.50		12.00		363.0		10	1.5	500.0	370.00		5.50		394.0	995.0	262.0		22.40	630.0	0.4	
400	4.50		12.00		383.0		10	1.5	525.0	390.00		5.50		414.0	1040.0	250.0		21.40	601.0	0.3	



SP



INDUSTRIAL - INOX sp.j.